



Industrial



Auto




Wood



EZ SIDE DOWNDRAFT

- EZ TO INSTALL
- EZ TO OPERATE
- EZ TO MAINTAIN
- EZ TO PRESSURIZE

BOOTH SHOWN WITH
OPTIONAL POWDER COATING




- Control panel and other electric components can be purchased separately
- ETL listed when optional when control panel is added



- Industry-leading light levels
- Spray booth specific, dual voltage T-8 32-watt light fixtures
- Quality brand-name tubeaxial fans and motors
- Air solenoid valve



- Windowed personnel access doors are pre-hung in a heavy gauge galvanized steel frame for easy installation.
- Product doors are field hung on slotted hinges to facilitate installation on uneven floors



- Constructed from 18 gauge, prime-quality steel
- All panels and support members are precision punched for easy nut and bolt assembly
- 5/16" bolt with self locking nuts

OVERVIEW

The Col-Met EZ Side Downdraft Booth intakes fresh air from the cleaner upper levels of the shop through a filtered booth ceiling. The filtered air is drawn down and away from the product through exhaust filters at the floor level, along both sides. This provides efficient overspray control that reduces prep time and also provides a much healthier workplace environment without an expensive downdraft exhaust pit. This booth can also be purchased with a pre-filtered plenum or with a pressurized intake plenum, the booth can also be equipped with an air replacement unit and cure cycle to meet your requirements. This booth also available in either drive-through or solid back configurations.

LIGHTING FEATURES

Bright, full booth illumination is provided by ten four-tube, 48", 32-watt, fluorescent light fixtures in the angled ceiling panels and side walls. Each is sealed behind clear, tempered safety glass. All fixtures are UL listed and approved for their intended use and placement.



Industrial




Auto



Wood



EZ SIDE DOWNDRAFT

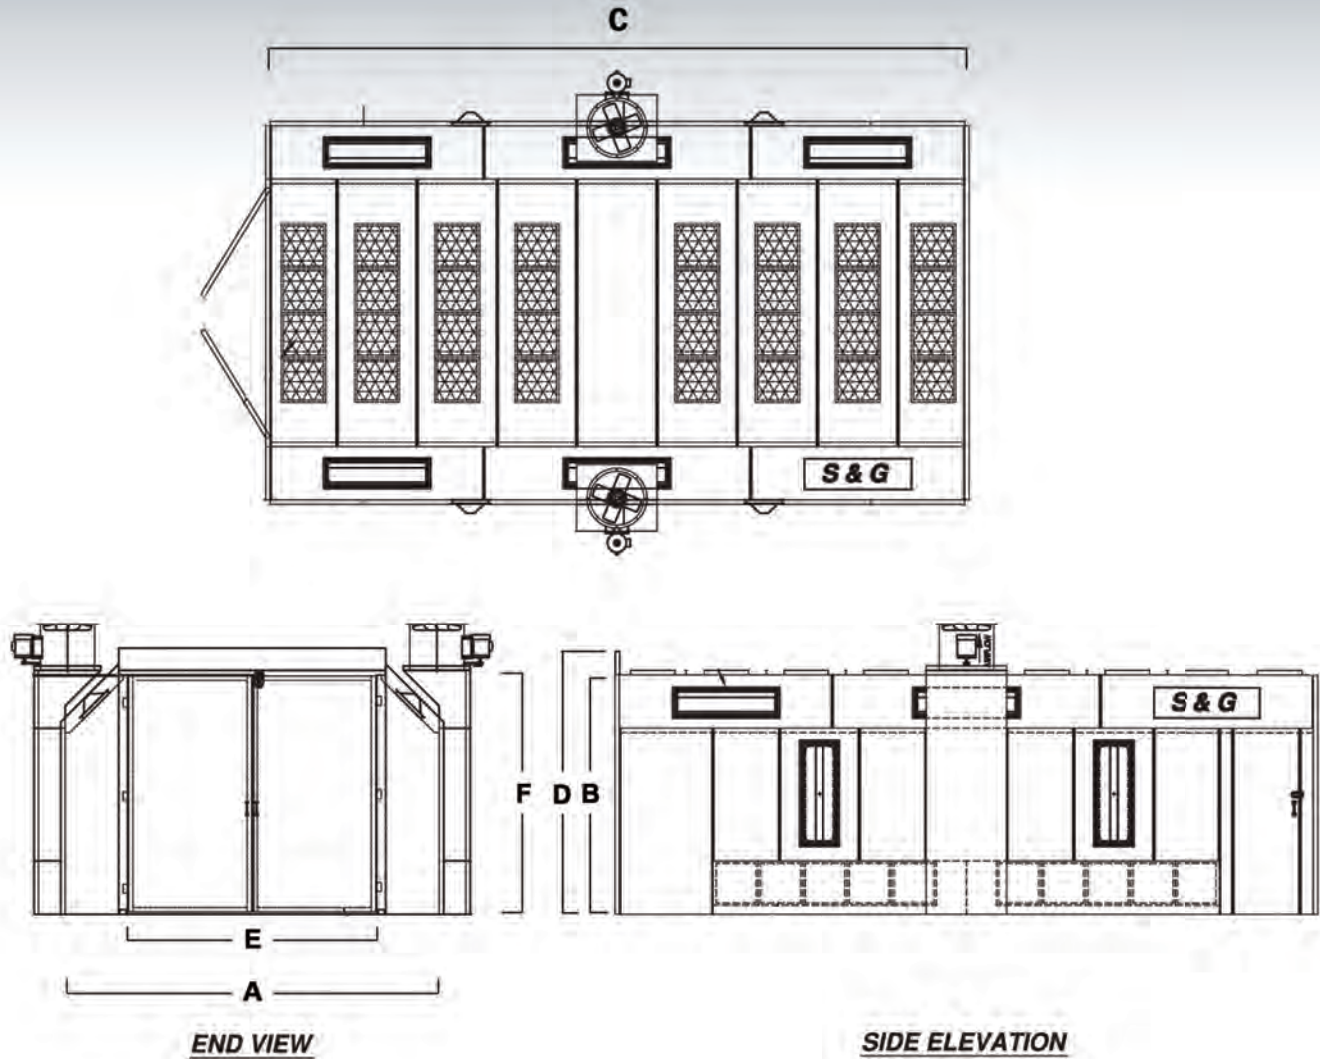

Model Number	Interior Dimensions			Exterior Dimension			Access Doors	Nominal Door Opening				Lights		Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	Open	S&G		Dia.	HP	Int.	Exh.
ESD-14-09-26-N-SB	14'-0"	9'-0"	26'-0"	16'-4"	10'-0"	26'-4"	1	9'-4"	8'-10.5"	1	Solid	9	1	12,740	(2) 24"	2HP	32	20
Reference Key	A	B	C		D			E	F									

Alternative Configurations: Drive Through (DT)
 Alternative Options: Pressurized (P) Pre-Filtered (PF)
 Standard Length Sizing is Illustrated above