



automotive industrial

ENVIROFLO® SIDE DOWNDRAFT BOOTHS

- **DOWNDRAFT BENEFITS**
- **NO PIT REQUIRED**
- **CANTED SIDE WALLS FOR IMPROVED LIGHTING AND AIRFLOW**

This Col-Met booth intakes fresh air from the cleaner upper levels of the shop through a filter bank in the booth ceiling. The filtered air is drawn down and away from the vehicle through exhaust filters at floor level along both sides. This provides efficient overspray control that reduces prep time and also provides a much healthier workplace environment without an expensive downdraft exhaust pit.

This booth can be equipped with an air replacement unit and cure cycle to meet your requirements. It is available in both drive-through and solid-back designs.

LIGHTING FEATURES

Bright full booth illumination is provided by twelve 48", four-tube, 32-watt fluorescent light fixtures in the angled ceiling panels. Each is mounted behind clear, tempered safety glass and sealed with a gasket. All fixtures are UL listed and approved for their intended use and placement.



SHOWN WITH OPTIONAL COL-MET BOOTH COATING



CONSTRUCTION FEATURES AND QUALITY STANDARDS

- Booths are constructed from 18 gauge, prime-quality galvanized steel
- All panels and support members are precision punched for easy nut and bolt assembly
- Quality brand-name tubeaxial fans and ODP motors
- 5/16" inch bolts with self locking nuts
- Industry-leading light levels
- Spray booth specific, dual voltage T-8 32-watt light fixtures
- Booths include installation instructions, fan, motor & drive, fasteners, hardware, and sealant necessary for assembly
- Personnel access doors are pre-hung in a heavy gauge galvanized steel frame for easy installation
- Product doors are field hung to facilitate installation on uneven floors
- Brixon™ latches are provided for each door opening
- Control panel and other electric components can be purchased separately




OPTIONAL CONTROL PANEL



COL-MET SPRAY BOOTHS COMPLY WITH ALL APPLICABLE OSHA AND NFPA REGULATIONS.

ENVIROFLO® SIDE DOWNDRAFT BOOTHS

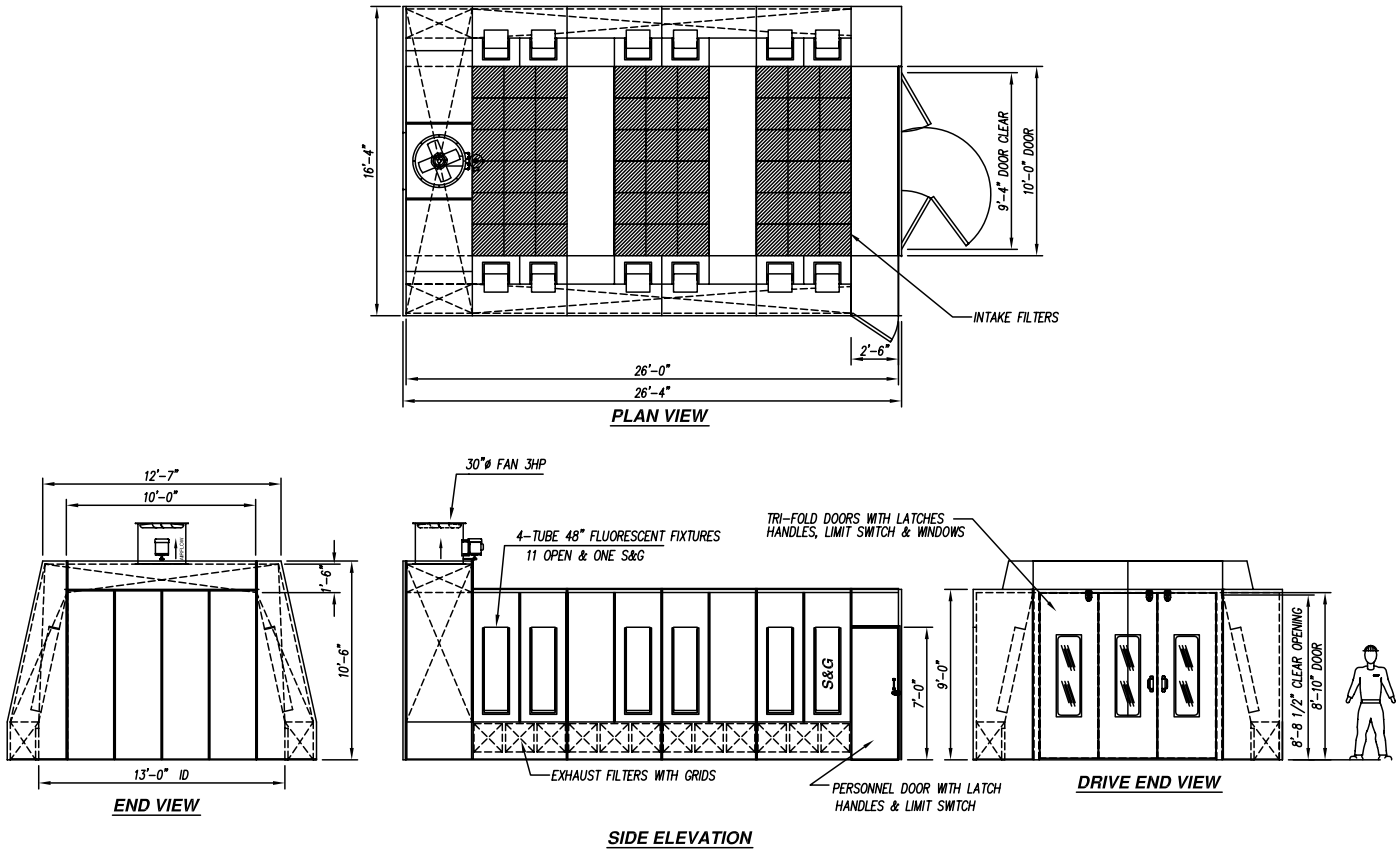

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening		Qty	Type	Illumination			Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height			S&G	Open	Total		Dia.	HP	Int.	Exh.
EF26SB	13'-0"	8'-10"	26'-0"	16'-4"	10'-6"	26'-4"	1	9'-4"	8'-10"	1	TF	1	11	12	11,900	30"	3 HP	54	24
EF26DT	13'-0"	8'-10"	26'-0"	16'-4"	10'-6"	26'-4"	1	9'-4"	8'-10"	2	TF	1	11	12	11,900	30"	3 HP	54	24
EF28SB	13'-0"	8'-10"	28'-0"	16'-4"	10'-6"	28'-10"	1	9'-4"	8'-10"	1	TF	0	12	12	12,968	30"	5 HP	54	24
EF28DT	13'-0"	8'-10"	28'-0"	16'-4"	10'-6"	28'-10"	1	9'-4"	8'-10"	2	TF	0	12	12	12,968	30"	5 HP	54	24
EF31SB	13'-0"	8'-10"	31'-0"	16'-4"	10'-6"	31'-4"	1	9'-4"	8'-10"	1	TF	1	11	12	14,105	30"	5 HP	54	24
EF31DT	13'-0"	8'-10"	31'-0"	16'-4"	10'-6"	31'-4"	1	9'-4"	8'-10"	2	TF	1	11	12	14,105	30"	5 HP	54	24



Col-Met Spray Booths
 Dallas, TX // e-mail: sales@colmetsb.com
 Toll-free: 888.452.6684 // www.colmetsb.com