

TITAN™

Advanced Performance. Total Reliability.

Line Stripers



TITAN™

Advanced Performance. Total Reliability.

Line Stripers

For Your Toughest Striping Applications

CONTENTS

| | |
|-------------------------------------|-------|
| Gear Driven Line Stripers | 4 |
| PowrLiner™ 550 | 4 |
| PowrLiner™ 850 | 5 |
| PowrLiner™ 1800M | 6 |
| PowrLiner™ 2850 | 7 |
| Hydraulic Line Stripers | 8 |
| PowrLiner™ 4950 | 9 |
| PowrLiner™ 6950/8950 | 10 |
| PowrDriver | 11 |
| Accessories | 12-13 |
| Specifications | 14-15 |
| Warranty | 16 |



Why Titan™ SPEEFLO® PowrLiner™?

Professional contractors, property managers and maintenance personnel aren't interested in complicated machines: they want to get the job done quickly and done right. That is why serious contractors, maintenance managers and athletic organizations rely on Titan because only Titan offers them a full range of versatile, dependable line strippers for every application – from municipal parking lots and athletic fields to airport runways and football stadiums.

Titan SPEEFLO PowrLiners are built for dependable, precision performance — delivering crisp, clean lines that no conventional air-spray or aerosol system can accomplish. Our gear driven and hydraulic sprayers have an output range from .33 to 2.50 GPM and are capable of striping 106 to 800 linear feet/minute — up to 60% greater than competitive line strippers.

ADVANCED PERFORMANCE

- PowrLiners are designed BY professionals FOR professionals
- Our strippers are built for hard work and long life
- The latest engineering technology ensures ease of use and dependability
- Our strippers meet and exceed the expectations of contractors who want to do the job right the FIRST time.

TOTAL RELIABILITY

- Proven technology - you finish every job quickly and profitably
- Superior design and construction maximizes the service life of your line stripper
- Complete diversity of equipment – we have a stripper for every application
- Half a century of getting the job done right – Titan is the name you trust

UNSURPASSED SERVICE

- Dependable, reliable network of authorized sales and service distributors
- The best customer service in the industry to help you select and maintain your line stripper
- Professional application and service representatives ready to assist you with recommendations and technical support

THE BEST AND LONGEST WARRANTY IN THE INDUSTRY

When you purchase a PowrLiner you purchase performance. We stand behind that assurance and are so confident in the quality of our strippers that we offer the best and longest warranties in the industry, including:

- 4-Year Manufacturer's Defects, except PL550/850 (2 year warranty)
- 3-Year Gas Engine Warranty
- Lifetime Drive Train Warranty
- 35-Day Satisfaction Guarantee
- Express Parts Program
- WearGuard™ Convenience Program

Parking lots



Commercial and residential asphalt and concrete parking lots, street and roadways

Turf and fields



Athletic fields and sports turf, including football, soccer and municipal all-purpose fields

Small and large-scale projects



Airport runways, cargo and freight handling facilities

Stenciling



Special-purpose stenciling

Streets and roadways



Walk behind, and ride-on systems available

Clutch Driven Stripers

Titan SPEEFLO offers clutch-mechanical PowrLiners™ that incorporate gear-driven technology and are perfect for entry level and medium sized striping projects.

Titan SPEEFLO Clutch-Driven Piston Line Stripers

Durable Fluid Section

- Exclusive fluid section design requires no cylinder; fewer wear parts reduces maintenance cost
- Stainless steel rotating ball valves keep debris from sticking to minimize downtime and maximize performance
- Access and clean the ball valves without damaging packings or removing fluid section
- Patented, one-piece modular pump housing design makes routine service quick and easy – lasts up to 30% longer than competitor line stripers
- One-piece, self-adjusting static packings with wiper lip last up to 50% longer; lifetime cylinder warranty means you spray more and worry less. (PL2850)
- Reversible inlet and outlet seats last twice as long as standard seats

Reliable Subaru Gas Engine (PL1800m, PL2850)

- Proven engine technology — advanced performance, total reliability and proven overhead cam engines with the most powerful HP to GPM ratio and greater fuel efficiency than overhead valve engines
- Quiet operation — 33% fewer moving parts makes this one of the quietest engines operating today
- Easy Starting — 30% to 40% less pulling force than other engine brands

These high performance line stripers are designed for economical operation and precise line spraying. Ideal for maintenance personnel and entry level through full service contractors.

TITAN™ SPEEFLO® POWRLINER™ SERIES 550

The PowrLiner 550 is designed for entry level contractors and maintenance personnel who need a basic line striper capable of high-spraying pressures for smaller jobs on pavement, grass or turf.

- Simple, compact design weighs only 70 lbs. — easy to use, easy to transport and easy to store. Only requires one operator to transport and fits easily in most automobile trunks.
- Lightweight design
- Perfect for any organization or municipal budget




PowrLiner 550 Specifications

| | |
|-------------------------|----------|
| Max. Delivery | .33 GPM |
| Max. Operating Pressure | 3000 PSI |
| Max. Tip Size (1 Gun) | 0.019" |
| Engine, Gas | 37.7cc |
| Weight (empty) | 65 lbs |
| Part Number | 0290004 |

TITAN™ SPEEFLO® POWRLINER™ SERIES 850

The PowrLiner 850 is designed for entry level contractors and maintenance personnel who need a basic line striper capable of high-spraying pressures for smaller jobs on pavement, grass or turf. DirectLink™ pressure control allows the user to stencil and paint with airless technology at pressures from 200 psi to 3000 psi.

- Simple, compact design weighs only 70 lbs. — easy to use, easy to transport and easy to store. Only requires one operator to transport and fits easily in most automobile trunks.
- Lightweight design makes basic stenciling easy and fast
- Perfect for any organization or municipal budget
- Adjustable pressure from 200 - 3000 psi

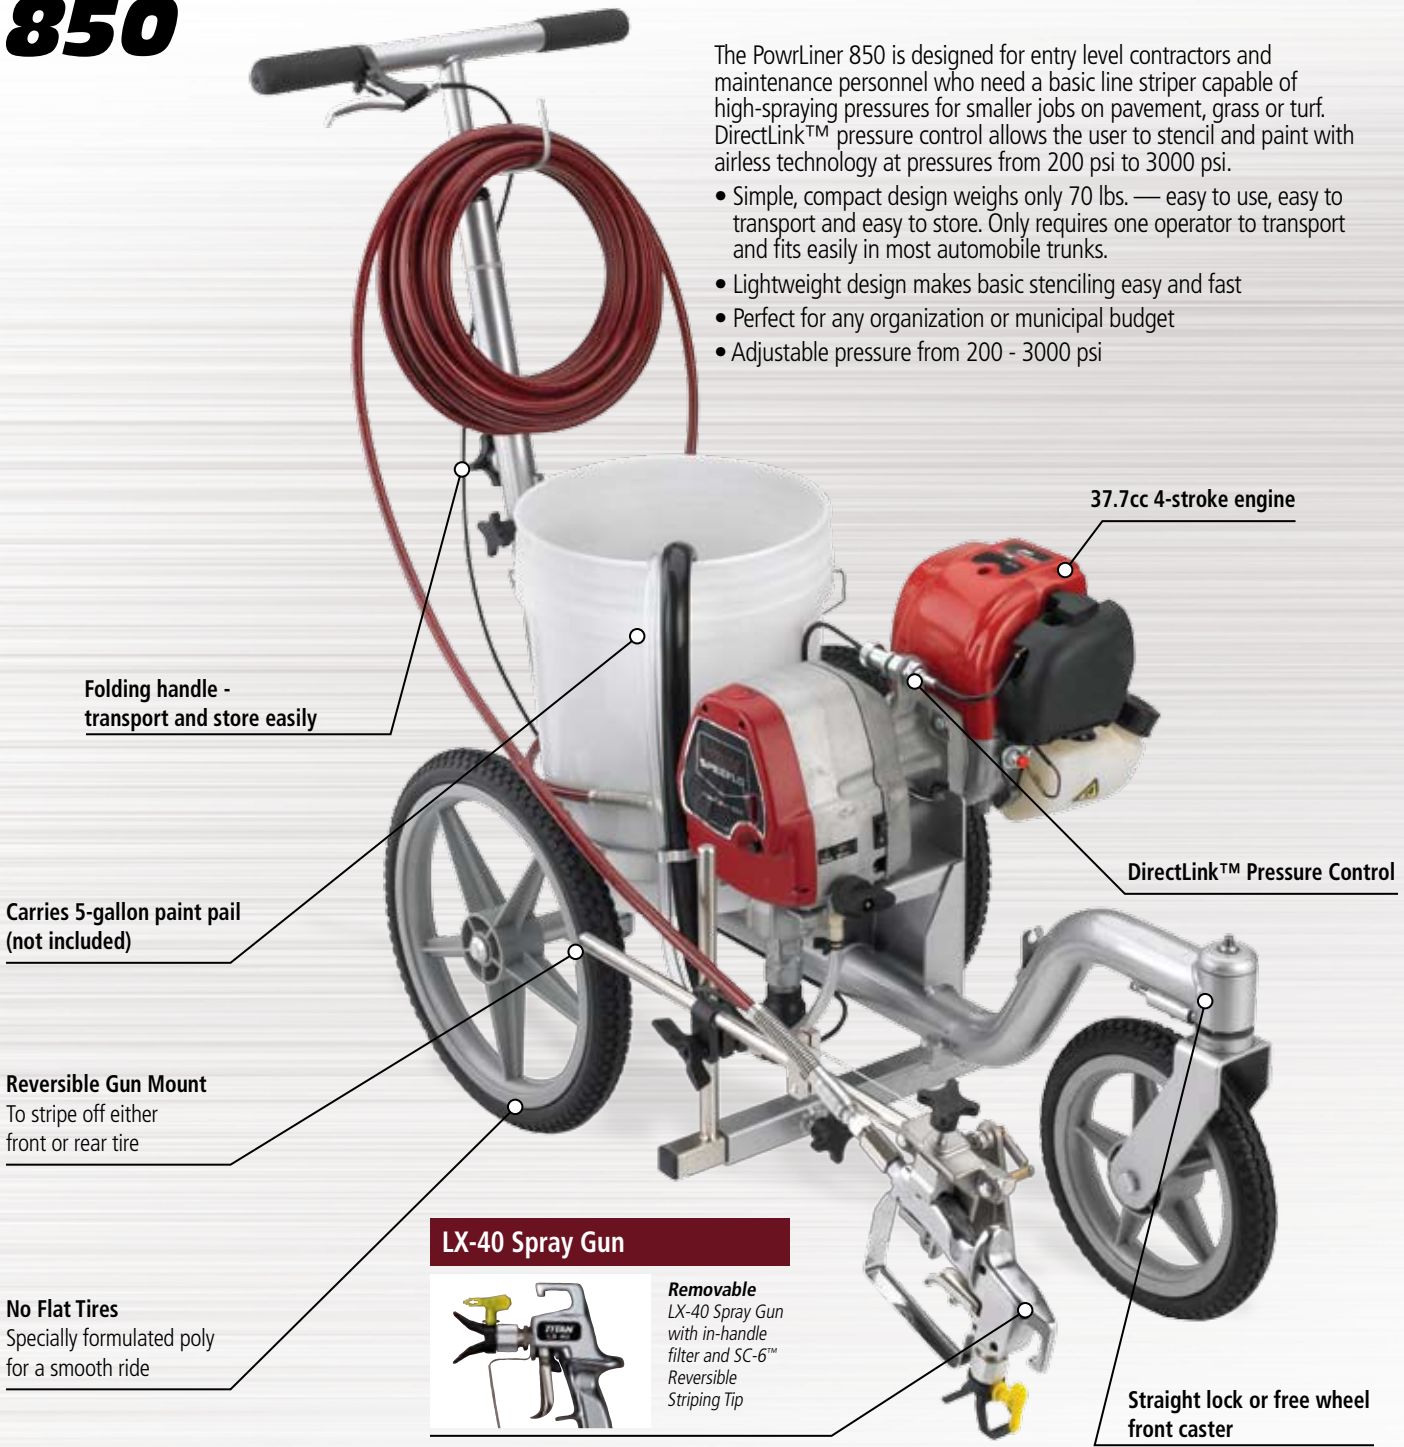

Folding handle -
transport and store easily

37.7cc 4-stroke engine

Carries 5-gallon paint pail
(not included)

DirectLink™ Pressure Control

Reversible Gun Mount
To stripe off either
front or rear tire

LX-40 Spray Gun



Removable
LX-40 Spray Gun
with in-handle
filter and SC-6™
Reversible
Striping Tip

No Flat Tires
Specially formulated poly
for a smooth ride

Straight lock or free wheel
front caster

Recommended for light, periodic-duty on small parking lots and athletic fields.

PowrLiner 850 Specifications


| | |
|-------------------------|----------|
| Max. Delivery | .33 GPM |
| Max. Operating Pressure | 3000 PSI |
| Max. Tip Size (1 Gun) | 0.021" |
| Engine, Gas | 37.7cc |
| Weight (empty) | 70 lbs |
| Part Number | 0290005 |



TITAN™ SPEEFLO® POWRLINER™ SERIES 1800M

The PowrLiner 1800M is the perfect, step-up line striper for contractors who need a compact, user friendly line striper for smaller jobs on pavement, fields or turf.

- Higher output and longer sustained use in a design that weighs only 145 lbs — easy to use, transport and store
- Versatile gun bracket can be positioned to spray on left, right, front or rear of striper
- Ideal for steady, light-duty use on both athletic fields and pavement; easy maneuverability makes tight turns and stenciling easy and fast.
- The ideal line striper for contractors and maintenance departments looking for simplicity, dependability and affordability for small scale projects

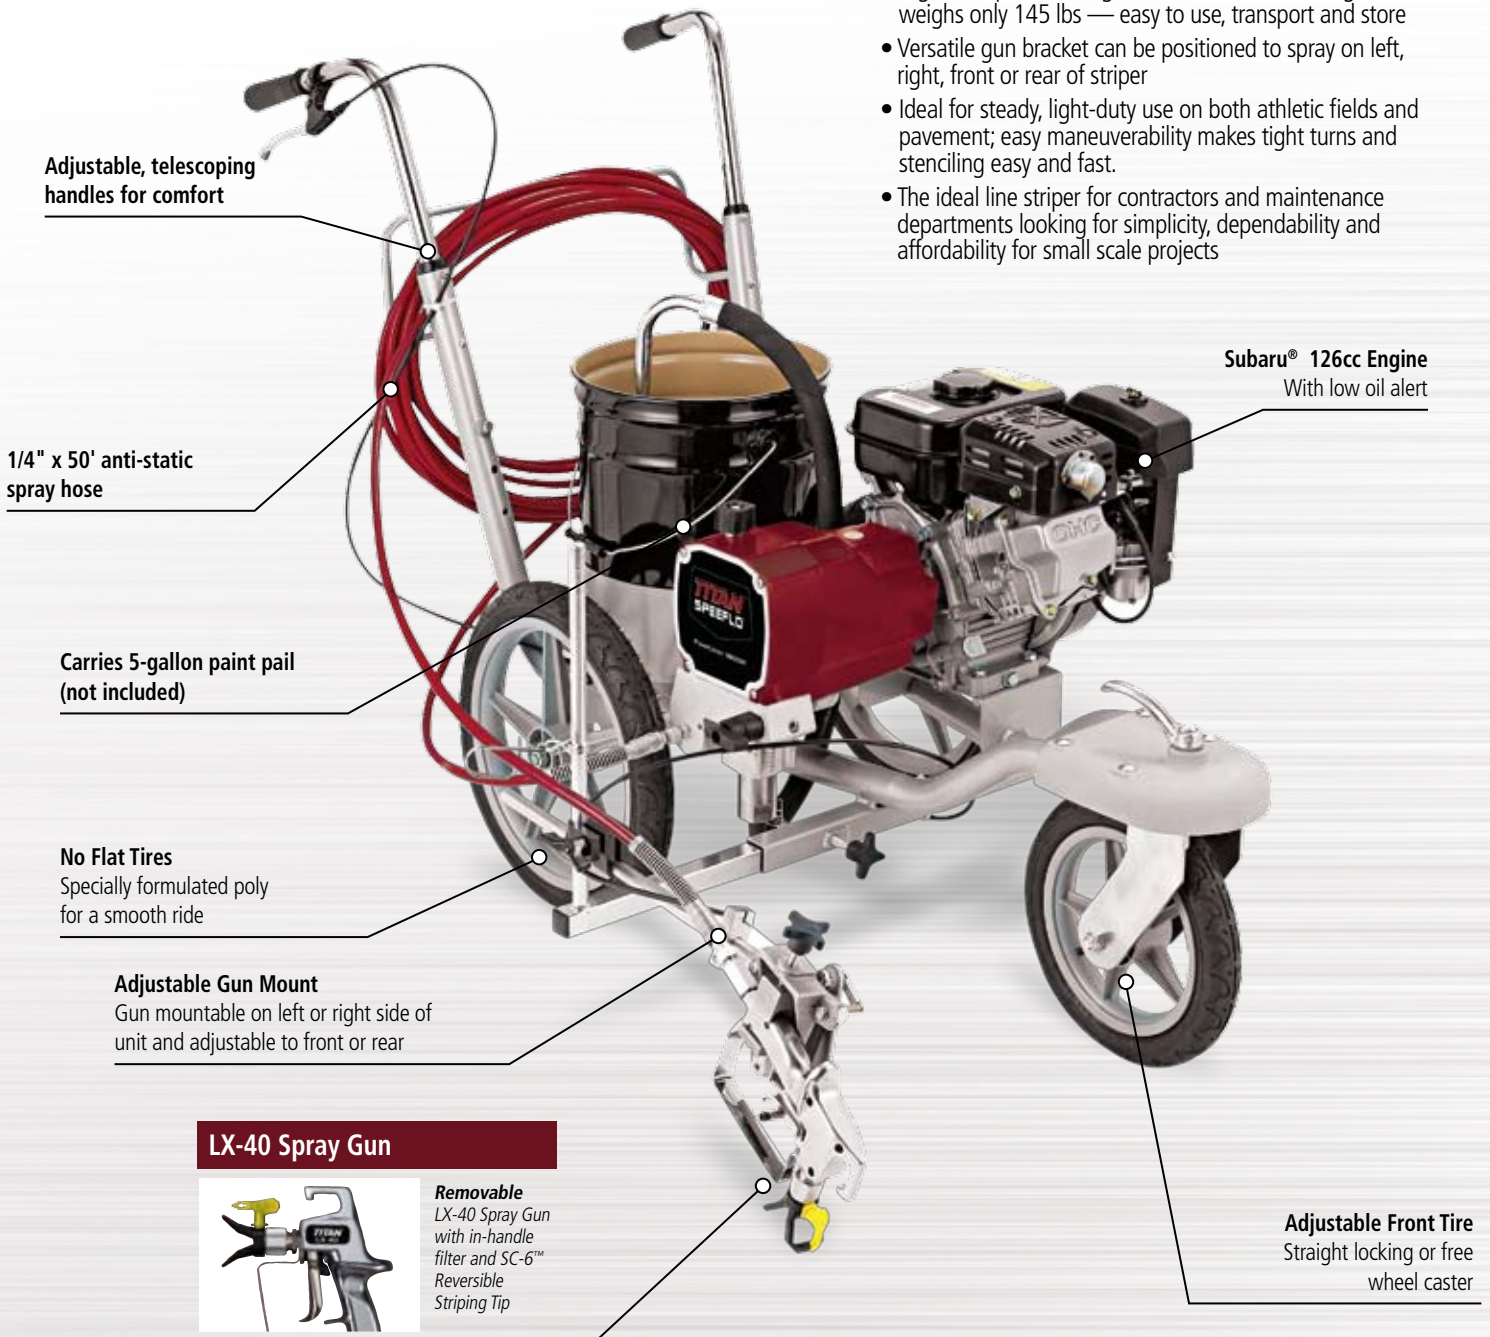

Adjustable, telescoping handles for comfort

1/4" x 50' anti-static spray hose

Carries 5-gallon paint pail (not included)

No Flat Tires
Specially formulated poly for a smooth ride

Adjustable Gun Mount
Gun mountable on left or right side of unit and adjustable to front or rear

LX-40 Spray Gun



Removable LX-40 Spray Gun with in-handle filter and SC-6™ Reversible Striping Tip

Subaru® 126cc Engine
With low oil alert

Adjustable Front Tire
Straight locking or free wheel caster

Recommended for light, intermittent-duty on small parking lots and athletic fields.

PowrLiner 1850 Specifications

| | |
|-------------------------|----------|
| Max. Delivery | .50 GPM |
| Max. Operating Pressure | 3000 PSI |
| Max. Tip Size (1 Gun) | 0.023" |
| Engine, Gas | 126cc |
| Weight (unit) | 80 lbs |
| Part Number | 759-191 |



TITAN™ SPEEFLO® POWRLINER™ SERIES 2850

The PowrLiner 2850 is designed to withstand the rigors of steady, everyday use on pavement, fields and turf. It's the perfect intermediate line striper that can handle all one-gun projects too big for the smaller line stripers.

- Fluid section has slower-stroking piston, slower cycle rate and larger displacement for longer performance life
- Higher output and longer sustained use in a design that weighs only 160 lbs — easy to use, transport and store
- Versatile gun bracket can be positioned to spray on left, right, front or rear of striper
- Ideal for medium-size projects on athletic fields and pavement; easy maneuverability makes tight turns and stenciling easy and fast.
- Perfect for contractors who need a maneuverable, medium-duty line striper for projects where the big machines just aren't profitable to operate.
- Available in one gun or two gun configurations

Adjustable, telescoping handles for comfort

1/4" x 50' anti-static spray hose

Adjustable Gun Mount
Gun mountable on left or right side of unit and adjustable to front or rear

Subaru® 126cc, OHC Engine
With low oil alert

LX-80" Spray Gun



Removable LX-80" Spray Gun with in-handle filter and SC-6™ Reversible Striping Tip

Front Swivel Caster
Tracks straight and unlocks for easier maneuvering

Recommended for one-gun projects on all parking lots and athletic fields.

PowrLiner 2850 Specifications

| | |
|-------------------------|----------|
| Max. Delivery | .92 GPM |
| Max. Operating Pressure | 3300 PSI |
| Max. Tip Size (1 Gun) | 0.032" |
| (2 Gun) | 0.019" |
| Engine, Gas | 126cc |
| Weight (unit) | 160 lbs |
| Part Number (1 Gun) | 0290008 |
| (2 Gun) | 0290009 |



Hydraulic Driven Line Stripers

Titan SPEEFLO offers two-gun PowrLiners™ that incorporate hydraulic pump technology for heavy-duty, long-term use on medium, large and giant scale striping projects.

Titan™ SPEEFLO® Hydraulic Piston Line Stripers

SPEEFLO® HydraDrive™

- Reliable, smooth, slow-stroking hydraulic drive greatly extends the operational life of the sprayer.
- External-hydraulic fluid porting with new, upgraded fittings allows for quick troubleshooting and easy maintenance.
- SAE O-Ring fitting and precision rod alignment ensure maximum pump life.

Severe Service 900™ Pump

- Cylinder and piston rod are tempered with a proprietary heat-treating process that increases pump life 150% longer than competitive pumps.
- Self-adjusting packings resist over-tightening and help prevent premature wear.
- Foot valve removes easily for faster cleaning and easy maintenance.
- Reversible inlet and outlet seats have twice the lifespan of ordinary outlet seats. Extra large ball valves ensure efficient pump operation and longer unit life.
- Heavy-duty prime/spray valve ensures consistent increased flow and faster pump priming.

Electric Convertibility

Easy, tool-free convertibility from gas-power to electric power for projects where gas engines are not permitted.

These high-performance, heavy-duty line strippers use long-stroke, slow-cycling hydraulic piston technology for economical operation and dependable, long-term line spraying. They are the ultimate line striping workhorses for serious contractors.

Speeflo® HydraDrive™



Mechanical valve eliminates expensive, unreliable electronic switching devices.



External hydraulic fluid porting with new upgraded fittings allow for quick troubleshooting and easy maintenance.



SAE O-Ring fitting for precision alignment.



Precision rod alignment for maximum chrome life.

Severe Service 900™ Pump



Self-adjusting packings prevent premature packing wear due to over-tightening.



New cylinder and piston rod material with proprietary heat treating process increases pump life up to 150% over the competition.



Reversible inlet and outlet seats double the life of standard seats. Extra-large ball valves for efficient pump operation and longer life.



Hand-tite foot valve and cylinder remove easily for quick cleaning and easy maintenance.




TITAN™ SPEEFLO® POWRLINER™ SERIES 4950

Designed and built for contractors who are serious about completing medium to large scale striping projects quickly and profitably. PowrLiner 4950 is the first step in hydraulic strippers where power and long-term, heavy duty operation are the difference between a business that makes money and one that does not.

- Dependable 169cc OHC Subaru® gas engine

- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Versatile gun bracket can be positioned to spray on left, right, front or rear of striper
- Precise pressure control from 400 psi to 3300 psi, for spraying light-bodied coatings all the way up to low-VOC striping paints.
- Heavy-duty, epoxy-finished frame resists harsh solvents and corrosion.

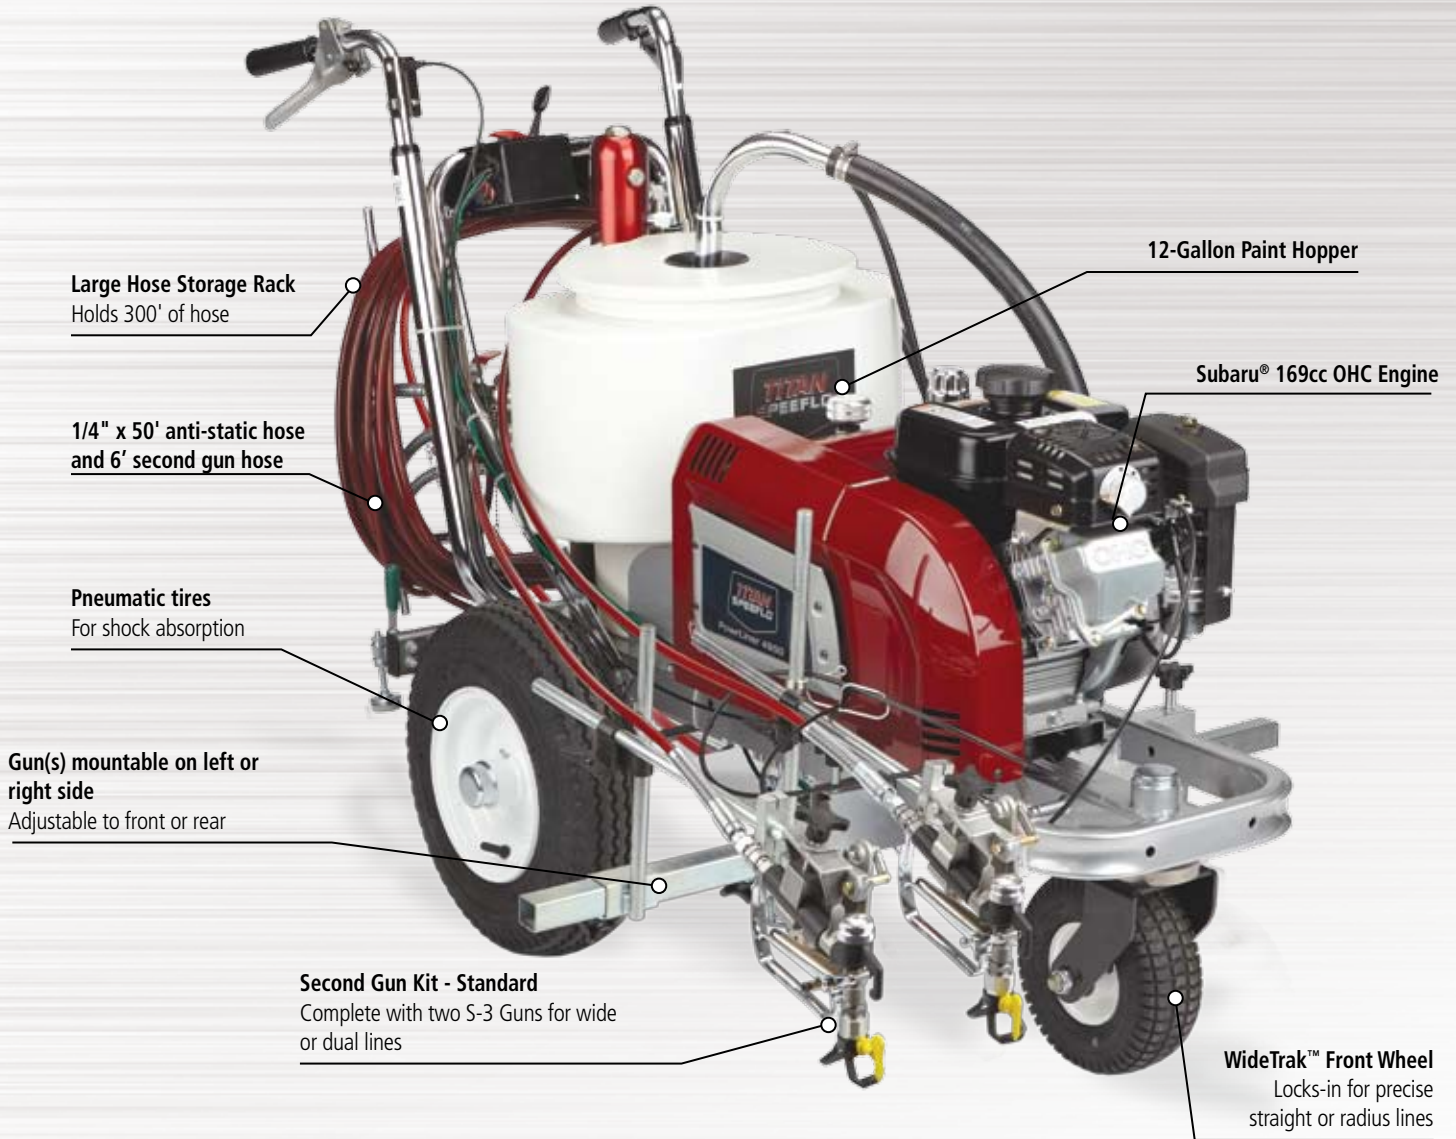

Recommended for full-time duty on parking lots and athletic fields.

PowrLiner 4950 Specifications



| | |
|-------------------------|----------|
| Max. Delivery, Gas | 1.5 GPM |
| Max. Delivery, Electric | 1.10 GPM |
| Max. Tip Size (1 Gun) | 0.037" |
| (2 Guns) | 0.028" |
| Max. Operating Pressure | 3300 PSI |
| Engine, Gas | 169cc |
| Motor, Electric | 2.0 HP |
| Part Number | 0290019 |



TITAN™ SPEEFLO® POWRLINER™ SERIES 6950/8950

Larger projects require more power and output. PowrLiner 6950 and 8950 line strippers are the workhorse machines of the industry, designed for ease of use and simple operation on major projects that require maximum performance with minimum downtime and maintenance.

- Powered by a dependable Subaru® 169cc or 211cc engine with Low-Oil Alert
- Electric start for easy operation
- Fast, easy, tool-free convertibility to 2 hp Extended-Life DC electrical motor
- Versatile gun bracket can be positioned to spray on left, right, front or rear of stripper
- Precise pressure control from 400 psi to 3300 psi, for spraying light-bodied coatings all the way up to low-VOC striping paints.
- Heavy-duty, epoxy-finished frame resists harsh solvents and corrosion.

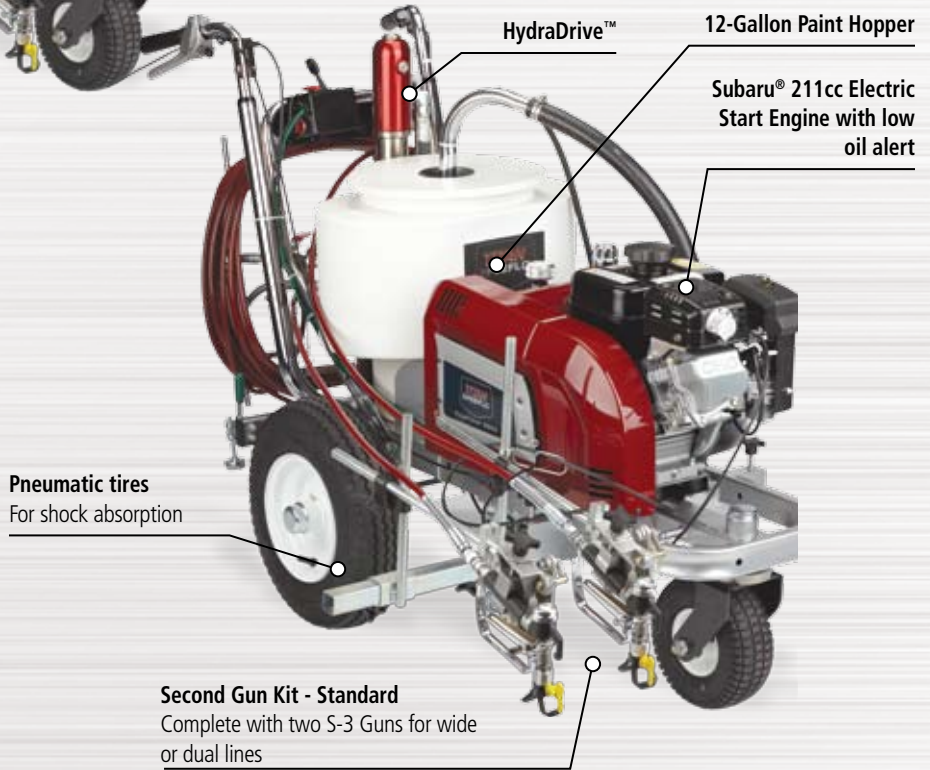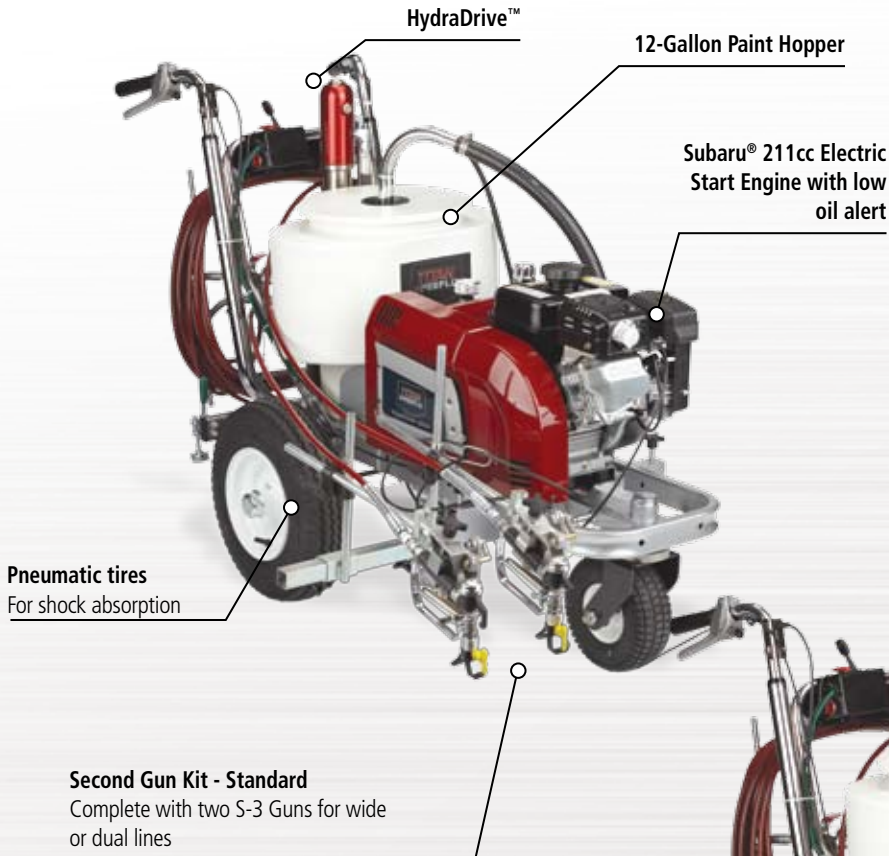

Recommended for large-scale, full-time duty on airports, roads, parking lots and athletic fields.

PowrLiner 6950 Specifications

| | |
|-------------------------|----------|
| Max. Delivery, Gas | 2.25 GPM |
| Max. Delivery, Electric | 1.25 GPM |
| Max. Operating Pressure | 3300 PSI |
| Max. Tip Size (1 Gun) | 0.050" |
| (2 Guns) | 0.033" |
| Engine, Gas | 211cc |
| Motor, Electric | 2.0 HP |
| Part Number | 0290010 |


PowrLiner 8950 Specifications

| | |
|-------------------------|----------|
| Max. Delivery, Gas | 2.50 GPM |
| Max. Delivery, Electric | 1.25 GPM |
| Max. Operating Pressure | 3300 PSI |
| Max. Tip Size (1 Gun) | 0.054" |
| (2 Guns) | 0.038" |
| Engine, Gas | 211cc |
| Motor, Electric | 2.0 HP |
| Part Number | 0290011 |

TITAN™ SPEEFLO® POWRLINER™ SERIES POWRDRIVER

The PowrDriver and PowrLiner series line striping equipment offer the professional striping contractor a smooth and easy means to finish all striping jobs. The PowrDriver comes complete with a variable hydrostatic drive, 169cc electric start Subaru engine, and sealed battery - all with the shortest footprint of any sulky in the market today.

The features of this sulky coupled with the industry leading performance of the PowrLiner series allow each and every contractor to finish their jobs quicker and easier. Ergonomically designed to give you the best site line for working comfort.

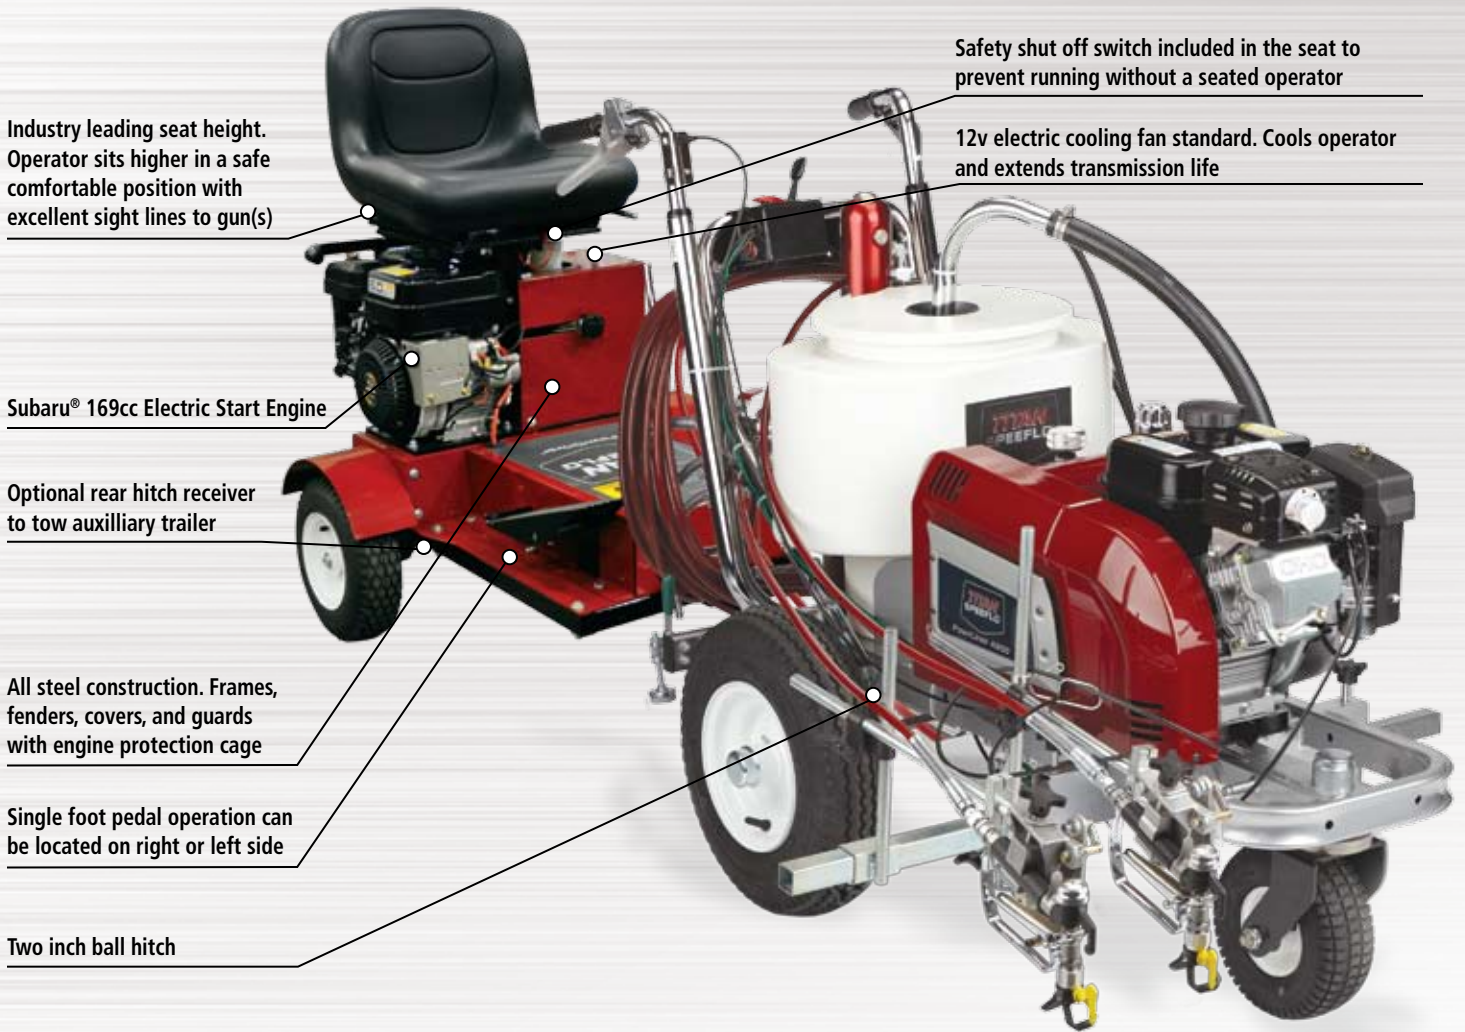

Industry leading seat height. Operator sits higher in a safe comfortable position with excellent sight lines to gun(s)

Safety shut off switch included in the seat to prevent running without a seated operator

12v electric cooling fan standard. Cools operator and extends transmission life

Subaru® 169cc Electric Start Engine

Optional rear hitch receiver to tow auxilliary trailer

All steel construction. Frames, fenders, covers, and guards with engine protection cage

Single foot pedal operation can be located on right or left side

Two inch ball hitch

* Striper sold separately

Recommended for very large-scale duty on airports, roads, parking lots and athletic fields.

PowrDriver Specifications

| | |
|----------------|-----------------------------|
| Variable speed | 0-10 mph |
| Engine | 169cc Subaru Electric Start |
| Weight: | 262 lbs. |
| Part Number | 0290007 |



Accessories

Turf Kit



Eliminates side to side movement when striping on uneven turf

Part No. 759-155

SureTrak™ Floating Gun Kit



Keeps the gun at the proper height from the surface for perfect lines over rough terrain

Part No. 759-120

Piston Lube



- Specially formulated to prevent materials from adhering to the piston rod
- Suitable for use with most airless piston pumps

8 oz. bottle — Part No. 314-480

4 oz. bottle — Part No. 314-481

1 Qt. bottle — Part No. 700-926

Liquid Shield Plus



- Cleans & protects your spray system against rust & corrosion
- Extends the life of your pump
- Now with anti-freeze protection

1 Qt. bottle — Part No. 314-482

4 oz. bottle — Part No. 314-483

Second Gun Kit for Dual Lines



Complete with gun for wide or dual lines. Mounts on either side of striper

Part No. 759-138 (S-3)

759-038 (S-5)

12-Gallon Hopper



Holds up to 12 gallons of paint

Part No. 759-130

Line Pointer



Points the way.

Part No. 424-620

Stencil Kit



Molded of 1/16" (.15 cm) durolast polyethylene, these stencils are very durable and lay flat on surfaces being stenciled for clean and accurate marking.

Kit contains one of each of the following:

- 21.5" (55 cm) Handicap
- 42" (105 cm) Straight and curved arrows
- 4" (10 cm) Visitors
- 4", 12" (10, 30 cm) No Parking
- 12" (30 cm) Numbers 0-9
- 4", 12" (10, 30 cm) Fire Lane
- 4" (10 cm) Reserved

Part No. 756-135

LX-40 Gun



- All-metal construction
- In-handle filter
- Tungsten carbide ball valve ensures long life
- Includes 517 SC-6™ reversible tip
- Pressure rated at 3000 PSI (20.7 MPa)

Part No. 550-540

LX-80" Gun



- All-metal construction
- High-pressure swivel
- In-handle filter
- Tungsten carbide ball valve ensures long life
- SC-6™ reversible tip
- Pressure rated at 3600 PSI (25 MPa)

Part No. 581-085

S-3 Gun



- All-metal construction
- High-pressure swivel
- Stainless steel fluid passages
- Tungsten carbide ball valve ensures long life
- Easy 4-finger trigger
- SC-6™ reversible tip
- Pressure rated at 3900 PSI (27 MPa)

Part No. 550-250

Five Gallon Metal Pail Cover



Great for PowLiner 550 and 850

Part No. 0509987

Glass Bead Dispensing Systems



Dispense glass beads accurately

| Description | Line width | Part No. |
|------------------------------|------------|----------|
| 1-Gun Kit w/Hopper | 4"-6" | 424-826 |
| 2nd Gun Kit (Dispenser only) | 4"-6" | 424-816 |
| 2-Gun Kit w/Hopper | 4"-6" | 424-836 |
| 1-Gun Kit w/Hopper | 12" | 424-840 |
| 2nd Gun Kit w/Hopper | 12" | 424-841 |

SC-6™ Reversible Line Striping Tips

Designed specifically for line striping applications such as parking lot lines, road lines, athletic field markings, etc. SC-6 striping tips create sharp edges for cleaner, more distinct lines that last longer. Designed to last longer than standard airless tips, SC-6 striping tips are precision machined from high quality Tungsten Carbide and are compatible with all striping coatings.



Recommended Tips (665-XXXX)

| | | Line Width (inches/mm) | | | | | | |
|----------|-------|------------------------|------------------|-------------------|-------------------|---------------------|---------------------|---------------------|
| | | 1-2" 25-51mm | 2-4" 51-102mm | 4-6" 102-152mm | 6-8" 152-203mm | 10-12" 255-305mm | 12-14" 305-357mm | 14-16" 357-406mm |
| Tip size | .013" | 1302 | 1304 | 1308 | | | | |
| | .015" | 1502 | 1504 | 1508 | 1512 | | | |
| | .017" | 1702 | 1704 | 1708 | 1712 | | | |
| | .019" | 1902 | 1904 | 1908 | 1912 | 1920 | | |
| | .021" | | 2104 | 2108 | 2112 | | 2124 | 2128 |
| | .023" | | | 2308 | 2312 | | 2324 | 2328 |
| | .025" | | | 2508 | 2512 | | | |
| | .027" | | | 2708 | 2712 | | | |
| | .029" | | | 2908 | 2912 | | | |
| | .031" | | | 3108 | 3112 | | | |
| | .035" | | | 3508 | 3512 | | | |
| | .039" | | | 3908 | 3912 | | | |
| | .043" | | | 4308 | 4312 | | | |

| | |
|--------------|---|
| Light Yellow | Stencils and Athletic Courts, Light Film, Use 100 mesh filter |
| Yellow | Stencils and Athletic Courts, Light Film |
| Dark Yellow | Stencils and Athletic Courts, Alkyd Only, Heavy Film |
| Grey | Most Traffic Paints, Heavy Film |
| Light Grey | Most Traffic Paints, Medium Film |
| Black | Most Traffic Paints, Light Film |
| Orange | Most Traffic Paints, High Speed, Heavy Film |
| Light Orange | Most Traffic Paints, High Speed, Medium Film |
| Red | Most Traffic Paints, High Speed, Light Film |
| Dark Red | All Traffic Paints, High Speed, Heavy Film |

TR²™ Reversible Line Striping Tips

Recommended Tips (694-XXXXXXX)

| Striping Tip Size | Stencil Tip Size | Flag | Filter (Insert color) | Usage | Part number | Description |
|-------------------|------------------|--------|-----------------------|-----------------------|-------------|-----------------|
| 2308 | 623 | Yellow | White | Striping / Stenciling | 694-2308623 | TR2 LS 2308/623 |
| 2108 | 621 | Yellow | White | Striping / Stenciling | 694-2108621 | TR2 LS 2108/621 |
| 1908 | 519 | Yellow | White | Striping / Stenciling | 694-1908519 | TR2 LS 1908/519 |
| 1708 | 517 | Yellow | White | Striping / Stenciling | 694-1708517 | TR2 LS 1708/517 |



Side Striper™

Curbs • Radius • Parking Lots • In-Between Cars • Warehouses • Sports Fields

The easy-to-use Side Striper is designed specifically for those smaller line striping jobs and touching up existing strips.

- Stripes in tight spaces, including between parked cars
- Works with any airless sprayer
- Compact, lightweight and portable
- Simple striping instructions
- Works with any airless sprayer

Kit includes:

- Gun holder and pole (1)
- SC-6 striping tip (1)
- Striping instruction (1)
- Wheels (3)
- Parts kit (1)
- P/N 759-150



Specifications



| | PowrLiner™ 550 | PowrLiner™ 850 | PowrLiner™ 1800M |
|---|--|--|--|
| Part #: 1-Gun 2-Gun 1-Gun (Self-Propelled) 2-Gun (Self-Propelled) | 0290004 — — — | 0290005 — — — | 759-191 — — — |
| Max. Tip Size: (Gas) 1-Gun 2-Gun (Electric) 1-Gun 2-Gun | 0.019" — — — | 0.021" (.017 Airless painting) — — — | 0.023" — — — |
| Max. Output: (Gas) (Electric) | .33 GPM (1.3 lpm) — | .33 GPM (1.3 lpm) — | .50 GPM (1.9 lpm) — |
| Max. Spraying Speed* | 106 linear ft. (32.3 m) per minute @ 1.2 mph (1.9 kph) | 106 linear ft. (32.3 m) per minute @ 1.2 mph (1.9 kph) | 240 linear ft. (73.2 m) per minute @ 2.7 mph (4.3 kph) |
| Line Width Range | 2" - 12" (5 cm - 30.5 cm) | 2" - 12" (5 cm - 30.5 cm) | 2" - 12" (5 cm - 30.5 cm) |
| Max. Operating Pressure | 3000 PSI (17.2 MPa) | 3000 PSI (17.2 MPa) | 3300 PSI (22.8 MPa) |
| Max. Hose Length | 50' (15.2 m) | 50' (15.2 m) | 300' (91.4 m) |
| Power Source | 37.7cc 4 stroke Engine | 37.7cc 4 stroke Engine | 126cc Subaru® OHC Engine w/Low-Oil Alert |
| Electric Motor | — | — | — |
| Pump Drive | Clutch Driven | Clutch Driven | Clutch Driven |
| Cycle Rate | — | — | — |
| Electrical System | — | — | — |
| Paint Outlet: Filter Element Filter Area | 60 mesh 3 in ² (19 cm ²) | 60 mesh 3 in ² (19 cm ²) | 60 mesh 14 in ² (90 cm ²) |
| Airless Gun | 550-540, LX-40 | 550-540, LX-40 | 550-540, LX-40 |
| Airless Hose | 0315265, 1/4" x 50' (7.5 m) | 0315265, 1/4" x 50' (7.5 m) | 316-505, 1/4" x 50' (15.2m) |
| Airless Striping Tips supplied per gun | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice |
| Operator's Manual | 313-2300 | 313-2300 | 313-2797 |
| Repair Kit: Pump Gun | 759-365 N/A | 759-365 N/A | 755-165 N/A |
| Optional Electric Motor Kit | — | — | — |
| Weight: Unit | 67 lbs (30 kg) | 67 Lbs (31 kg) | 145 lbs (66 kg) |
| Weight: Unit Crated | 75 lbs (34 kg) | 75 lbs (34 kg) | 170 lbs (77 kg) |
| Dimensions: Unit | 38" H x 29" W x 42" L (97 cm H x 74 cm W x 107 cm L) | 38" H x 29" W x 42" L (97 cm H x 74 cm W x 107 cm L) | 41" H x 30" W x 54" L (104 cm H x 79 cm W x 152 cm L) |
| Dimensions: Unit Crated | 24" H x 26" W x 46" L (61 cm H x 66 cm W x 116 cm L) | 24" H x 26" W x 46" L (61 cm H x 66 cm W x 116 cm L) | 49" H x 33" W x 64" L (125 cm H x 84 cm W x 163 cm L) |
| Dimensions: PowrHandler | — | — | — |
| Dimensions: PowrHandler Crated | — | — | — |

*Based on 4" (10 cm) line @ 15 mil wet film thickness and 320 linear feet per gallon coverage.

All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time without notice.

For Your Toughest Striping Application



| PowrLiner™ 2850 | PowrLiner™ 4950 | PowrLiner™ 6950 | PowrLiner™ 8950 |
|--|--|--|--|
| 0290008 0290009 — | — 0290019 — | — 0290010 — | — 0290011 — |
| 0.030" 0.019" — — | 0.036" 0.028" 0.031" 0.023" | 0.048" 0.033" 0.036" 0.026" | 0.052" 0.038" 0.036" 0.026" |
| .92 GPM (3.2 lpm) — | 1.5 GPM (5.68 lpm) 1.10 GPM (4.07 lpm) | 2.25 GPM (9.77 lpm) 1.25 GPM (5.68 lpm) | 2.5 GPM (10.68 lpm) 1.25 GPM (5.68 lpm) |
| 416 linear ft. (126.8 m) per minute @ 4.7 mph (7.6 kph) | 400 Linear ft. (122 m) per minute @ 4.7 mph (7.6 kph) | 688 Linear ft. (210 m) per minute @ 7.8 mph (12.6 kph) | 752 Linear ft. (229 m) per minute @ 8.5 mph (13.7 kph) |
| 2" - 12" (5 cm - 30.5 cm) | 2" - 24" (5 cm - 60 cm) | 2" - 24" (5 cm - 60 cm) | 2" - 24" (5 cm - 60 cm) |
| 3300 PSI (22.8 MPa) | 3300 PSI (22.8 MPa) | 3300 PSI (22.8 MPa) | 3300 PSI (2.28 MPa) |
| 300' (91.4 m) | 300' (91.4 m) | 300' (91.4 m) | 300' (91.4 m) |
| 126cc Subaru® OHC Engine w/Low-Oil Alert | 169cc Subaru® OHC Engine | 211cc, Subaru® OHC w/Low-Oil Alert - Electric Start | 211cc, Subaru® OHV w/Low-Oil Alert - Electric Start |
| — | 2 hp (1.5 kw) Extended Life DC | 2 hp (1.5 kw) Extended Life DC | 2 hp (1.5 kw) Extended Life DC |
| Clutch Driven | Hydraulic | Hydraulic | Hydraulic |
| — | 87 per gallon (23 per liter) | 55 per gallon (15 per liter) | 40 per gallon (11 per liter) |
| — | — | 12 W | 12 W |
| 60 mesh 14 in ² (90 cm ²) | 50 mesh 18 in ² (116 cm ²) | 50 mesh 18 in ² (116 cm ²) | 50 mesh 18 in ² (116 cm ²) |
| 581-085, LX-80 ^{II} | 550-250, S-3 | 550-250, S-3 | 550-250, S-3 |
| 316-505, 1/4" x 50' (15.2m) | 316-505, 1/4" x 50' (15.2 m) | 316-505, 1/4" x 50' (15.2 m) | 316-505, 1/4" x 50' (15.2 m) |
| 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .017" orifice | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice | 1 ea., 665-1908, SC-6™ Striping Tip, 4" Line by .019" orifice |
| 313-2797 | 313-2593 | 313-2596 | 313-2582 |
| 759-268 580-034 | 107-051 520-275 | 144-050 520-275 | 144-050 520-275 |
| — | 506-217 | 506-211 | 506-276 |
| 160 lbs (73 kg) | 235 lbs (107 kg) | 245 lbs (111 kg) | 255 lbs (117 kg) |
| 185 lbs (84 kg) | 370 lbs (167 kg) | 380 lbs (172 kg) | 385 lbs (175 kg) |
| 41" H x 30" W x 54" L (104 cm H x 79 cm W x 152 cm L) | 41" H x 31" W x 60" L (104 cm H x 79 cm W x 152 cm L) | 41" H x 31" W x 60" L (104 cm H x 79 cm W x 152 cm L) | 41" H x 31" W x 60" L (104 cm H x 79 cm W x 152 cm L) |
| 49" H x 33" W x 64" L (125 cm H x 84 cm W x 163 cm L) | 49" H x 33" W x 64" L (125 cm H x 84 cm W x 163 cm L) | 49" H x 33" W x 64" L (125 cm H x 84 cm W x 163 cm L) | 49" H x 33" W x 64" L (125 cm H x 84 cm W x 163 cm L) |
| — | — | — | — |
| — | — | — | — |



Variable speed 0-10 mph
 Engine 169cc Subaru Electric Start
 Weight: 262 lbs.
 P/N 0290007

PowrDriver

TITAN™

Advanced Performance. Total Reliability.

Line Stripers

The Best & Longest Warranty in the Industry



Titan® line stripers are built to last. We are so confident that our PowrLiner™ Series line stripers will hold up to the most difficult jobs that we offer the best and longest warranty in the industry.

4-Year Manufacturer's Defects (1800M, PL8900)

We pledge that our sprayers are free from defects in materials and workmanship. This excludes normal wear items and consumables such as filters, piston, packings, tips, etc.
(1 year manufacturer's defect on PL550 & PL850)

3-Year Honda® Engine Warranty

Against defects in materials and workmanship.

3-Year Subaru® Engine Warranty

Against defects in materials and workmanship.

35-Day Satisfaction Guarantee

For any reason the sprayer does not perform up to your expectations within 35 days, the sprayer can be exchanged for the identical model or full credit toward the purchase of a Titan line striper of larger size and value.

Express Parts Program

- Over 400 Authorized Service Centers nationwide.
- The most common repair parts are guaranteed to be in stock 100% of the time.
- If for any reason your preferred Authorized Service Center is out of stock, FREE 2nd day air is available when ordered by 3:00 pm EST.

WearGuard™ Convenience Program

Purchase a new PowrLiner™ Series line striper and qualify for one of the following packages:

- A: Receive the repacking kit for the line striper at no charge. This kit includes packings, upper and lower balls, seals and o-rings.
- B: Purchase the striper's major repacking kit and save up to 78%! In addition to the standard repacking parts, this kit includes a piston and both upper and lower seats.
 - PL550, PL850, PL1800M, PL2850 . . . \$35
 - PL4950, PL6950, PL8950 \$125
- C: Purchase the striper's complete fluid section and save up to 83%! This kit includes all the necessary parts allowing you to replace the fluid section right on the job site.
 - PL550, PL850, PL1800M, PL2850 . . . \$99
 - PL4950, PL6950, PL8950 \$250

For more information about the industry's leading warranty, please call the Titan® Technical Service Department at 1-800-526-5362.



Advanced Performance. Total Reliability.

Sold exclusively through professional distributors

Titan Tool, Inc.
1770 Fernbrook Lane
Minneapolis, MN 55447
1-800-526-5362
Fax 1-800-528-4826

**International Sales
Titan Tool, Inc.**
1770 Fernbrook Lane
Minneapolis, MN 55447
1-201-337-1240
Fax 1-201-405-7449

Titan Tool of Canada
200 Trowers Road, Unit 7B
Woodbridge, Ontario L4L-5Z8
1-800-565-8665
Fax 1-905-856-8496

Visit us on the web at: www.titantool.com
Call Tech Services at 1-800-526-5362 for complete warranty information.

All information contained in this brochure is based on the latest information available at time of printing. Titan reserves the right to make changes at any time, without notice.